

PARCEL BELT

EASILY TRANSPORTS PRODUCTS THROUGH DISTRIBUTION & FULFILLMENT CENTERS

SPECIFICATIONS

BELT WIDTHS: Standard: 24" / 36" / 42" / 48" / 60"

SPEED: 60-400fpm

FRAME: 10-12g with Optional Impact Plates

ELEVATION: Ground Elevated and Ceiling Supported

GUARD RAIL: Standard: 10" 12" 24", Application Dependent

MTBH: Box, Poly, RNC, Application Dependent

SOUND: 80 db or under standard, Application Dependent

PRODUCT DESCRIPTION

With strong demand for heavy-duty bulk conveyors in distribution and fulfillment centers, LogistiQ offers both bolted and welded conveyor constructions to suit a wide range of applications. These systems are available with medium- and heavy-duty drives, tail sections with dead-end pulleys, noseover and hitched transitions for incline and horizontal conveying, and intermediate conveyor bed sections with side and bottom covers in both slider-bed and roller-bed designs. Our structural tube supports simplify field installation with infinite elevation adjustment, while common accessories such as knee braces, transition plates, adjoining gravity roller conveyors, and spiral chutes ensure seamless system integration. We meet the specifications of many parcel belt end users and bring proven experience working with a wide range of belt manufacturers.

ADDITIONAL FEATURES & BENEFITS

- Highly Customizable
- Premium Efficiency Motors
- Smooth Operation
- Reversible Incline/Decline
- Variable Speed
- Conveying Irregular Packages


WHAT IT CAN BE USED FOR

- Distribution & Fulfillment Centers
- Collection
- Sortation
- Inbound & Outbound
- Transportation

PARCEL BELT CHUTES



CONCAVE TIP

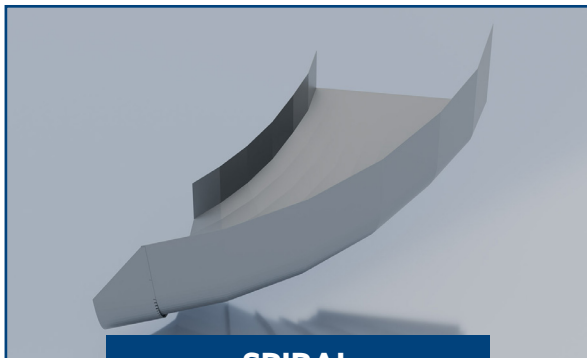

SPIRAL



SPIRAL TIP

PRODUCT DESCRIPTION

WIDTHS: Custom

ELEVATIONS: Custom

SIDE GUARD: Custom

MATERIAL: 12ga Galvanized with optional UHMW Liner.

SUPPORTS: Structural Tube Supports

COUNTERWEIGHT: Manual with locking

OPTIONAL: Chute Extension

STANDARD WIDTHS: 36" / 42" / 48" / 60"

INNER RADIUS: 30" - 36"

IN-FEED-DISCHARGE: 29.5" / 40.5a"

STANDARD ANGLES: 45° / 60° / 90°

MATERIAL: 12ga Galvanized with optional UHMW Liner.

SUPPORTS: Optional supports can be added if free standing.

OPTIONAL: Chute Extension

STANDARD WIDTHS: 36" / 42" / 48" / 60"

TAPERED WIDTHS -

- 60" infeed tapered down to 48" discharge
- 78" infeed tapered down to 60" discharge

ELEVATIONS: Custom

SPIRAL ANGLES: 45° / 60° / 90°

MATERIAL: 12ga Galvanized with optional UHMW Liner.

SUPPORTS: Structural Tube Supports

COUNTERWEIGHT: Manual with locking

OPTIONAL: Chute Extension

APPLICATION SPECIFIC

These are just a few of our Chute options that we offer. No two system solutions are exactly alike, which means many Chute solutions are application specific.

PARCEL BELT PLATFORMS



SORT / OPERATOR

PRODUCT DESCRIPTION

MAX WIDTH: 144"

MAX LENGTH: 240"

STAIRCASE: Available

HANDRAIL: 2-top or 3-top available

GRATING: 19w4 Bar

CONVEYOR ACCESS STEP: Available

ACCESS LADDER & EXTENSION RAIL: Available

MAINTENANCE & SHIP LADDERS: Available

CONSTRUCTION: Welded

SUPPORTS: Structural Tube Supports



MAINTENANCE

WIDTHS / LENGTHS / ELEVATIONS: Custom

STAIRCASES: Available

HANDRAIL: 2-top or 3-top Available

TOE PLATE: Available

SHIP LADDERS: Available

TREAD PLATE STRIPS: Available

TRUCK BUMPERS: Available

SUPPORT REINFORCEMENT: Available

CONSTRUCTION: Welded

GRATING: 19w4 Bar / Replaceable with Tread Plate

SUPPORTS: Structural Angle Supports



VAN LINE X

STANDARD ELEVATIONS: 24"

WIDTHS / LENGTHS / ELEVATIONS: Custom

STAIRCASES: Available

HANDRAIL: Available

GRATING: 19w4 Bar / Replaceable with smooth reinforced steel channels for unloader tracks.

CONSTRUCTION: Welded

FINISH: Powder

SUPPORTS: Heavy-Duty

STRUCTURAL BUMPERS: Heavy-Duty

NOSING: Safety Yellow